


# Turn up the volume

Our Multi Grapples are ideal for loading and sorting various materials as well as demolishing wooden and masonry structures.



MG range		MG 100	MG 200	MG 300	MG 400	MG 500	MG 800	MG 1000
Carrier weight class <sup>1)</sup>	t	0.7-1.2	1.2-3	2-5	4-8	5-9	10-16	12-20
Service weight (rotating version) <sup>2)</sup>	kg	80	180	285	445	465	900	1160
Product weight (rotating version)	kg	67	153	260	380	400	776	966
Product weight (static version)	kg	-	-	-	372	394	675	906
<b>A</b>	mm	620	651	750	892	892	1130	1275
<b>B</b>	mm	600	841	1,157	1,480	1,585	1,747	1,900
<b>C</b>	mm	310	450	500	603	705	800	810
<b>D</b>	mm	-	-	-	755	755	842	991
<b>F1</b>	t	0.6	1.5	2.0	2.3	2.4	3.8	4.6
Loading volume	m <sup>3</sup>	0.02	0.05	0.11	0.21	0.25	0.35	0.49
Oil flow rate (opening & closing)	l/min	15	25	35	40	35-50	70-100	85-120
Max. operating pressure (opening & closing)	bar	300	300	300	300	300	350	350
Oil flow rate (rotation)	l/min	3-5	5-10	5-10	10-15	10-15	20-25	20-25
Max. operating pressure (rotation)	bar	170	170	170	170	170	170	170

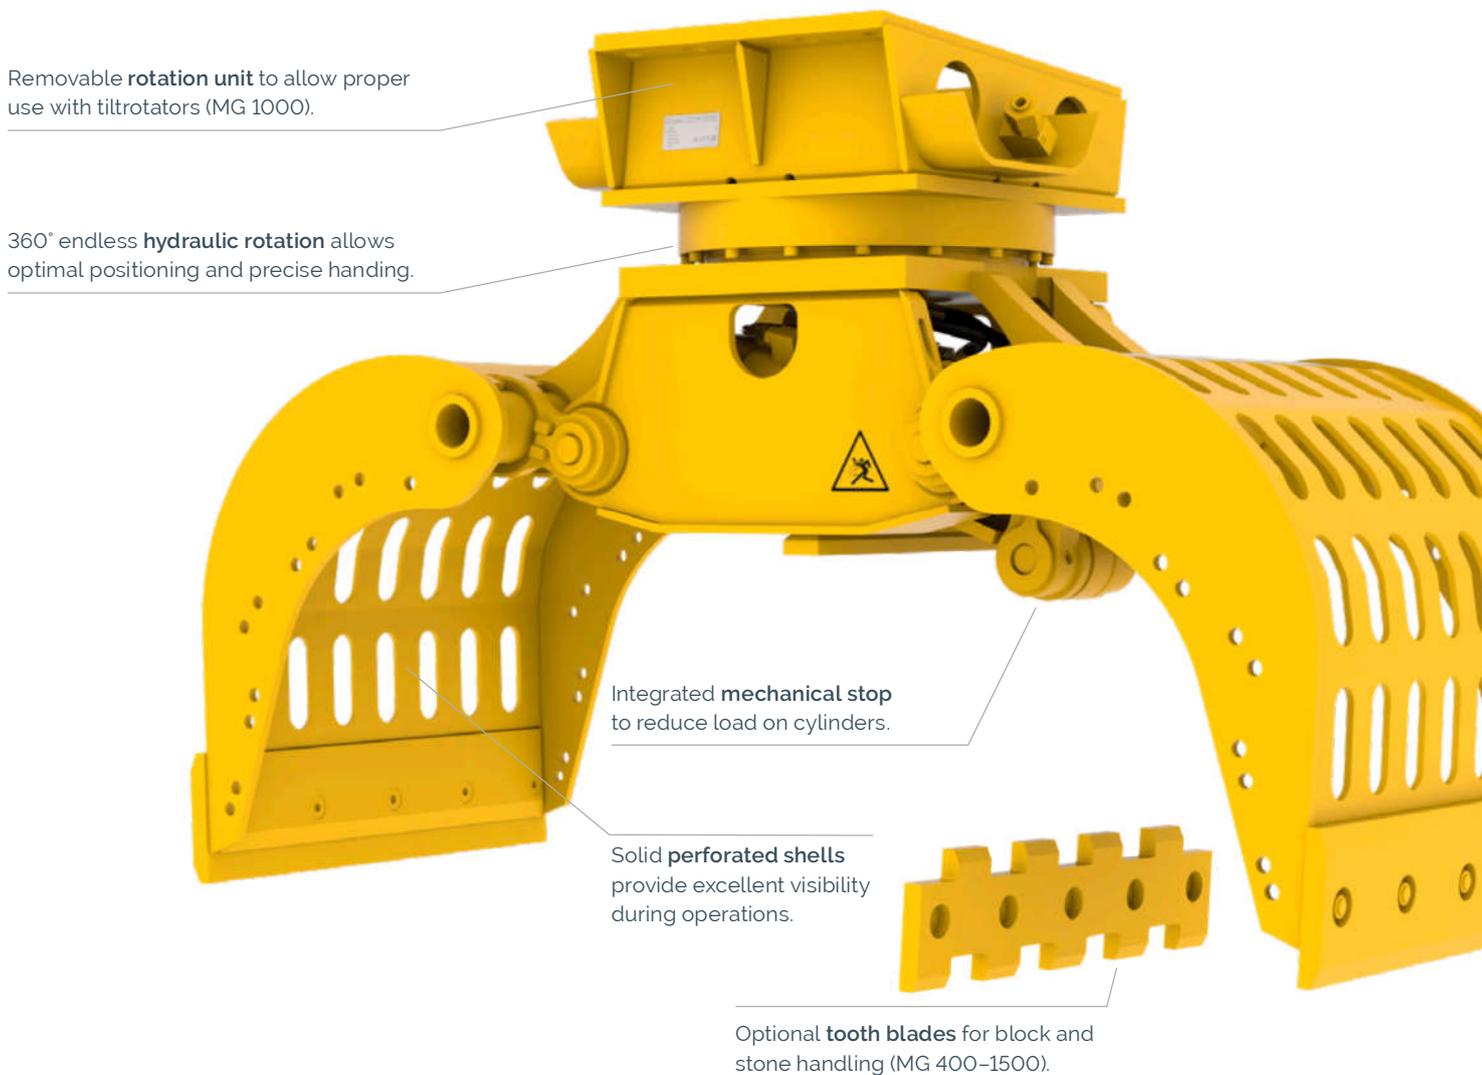

Our Multi Grapples handle any material with utmost precision. They deliver a steady grip and virtually constant closing force.




Cutting blades are both replaceable and reversible.

Optional bolt-on side plates for handling fine-grained material and debris (MG 400-1500).



Possible to switch from rotation to non-rotation or converse.

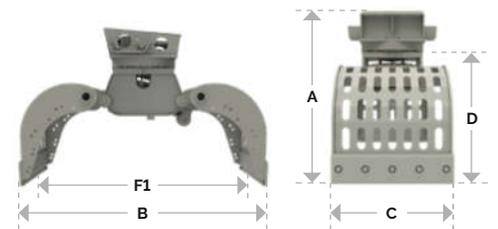

MG range		MG 1500	MG 1800	MG 2300	MG 2700	MG 3000	MG 5000
Carrier weight class <sup>1)</sup>	t	16-24	20-28	25-38	28-50	35-50	45-100
Service weight (rotating version) <sup>2)</sup>	kg	1,670	1,750	2,260	2,800	3,265	5,700
Product weight (rotating version)	kg	1,480	1,600	1,996	2,545	3,000	5,000
Product weight (static version)	kg	1,336	-	-	-	-	-
<b>A</b>	mm	1,478	1,478	1,448	1,651	1,800	2,000
<b>B</b>	mm	2,014	2,014	2,255	2,246	2,460	3,000
<b>C</b>	mm	1,030	1,210	1,210	1,220	1,500	1,500
<b>D</b>	mm	1,130	-	-	-	-	-
<b>F1</b>	t	6.8	6.8	8.0	9.0	9.0	13.0
Loading volume	m <sup>3</sup>	0.73	0.86	0.88	0.92	1.30	1.60
Oil flow rate (opening & closing)	l/min	120-170	150-170	160-180	180-200	180-200	280-300
Max. operating pressure (opening & closing)	bar	350	350	350	350	350	350
Oil flow rate (rotation)	l/min	30-35	30-35	30-35	30-35	30-35	50-60
Max. operating pressure (rotation)	bar	170	170	170	170	210	210

<sup>1)</sup> Weights apply to standard carriers only. Any variances must be agreed with Epiroc and/or the carrier manufacturer prior to attachment.

<sup>2)</sup> Attachment with average-sized adapter plate.