


Sort it out on-site

Sort and separate rocks, crushed concrete and recycling material with speed and precision using our high-performance Bucket Screeners.

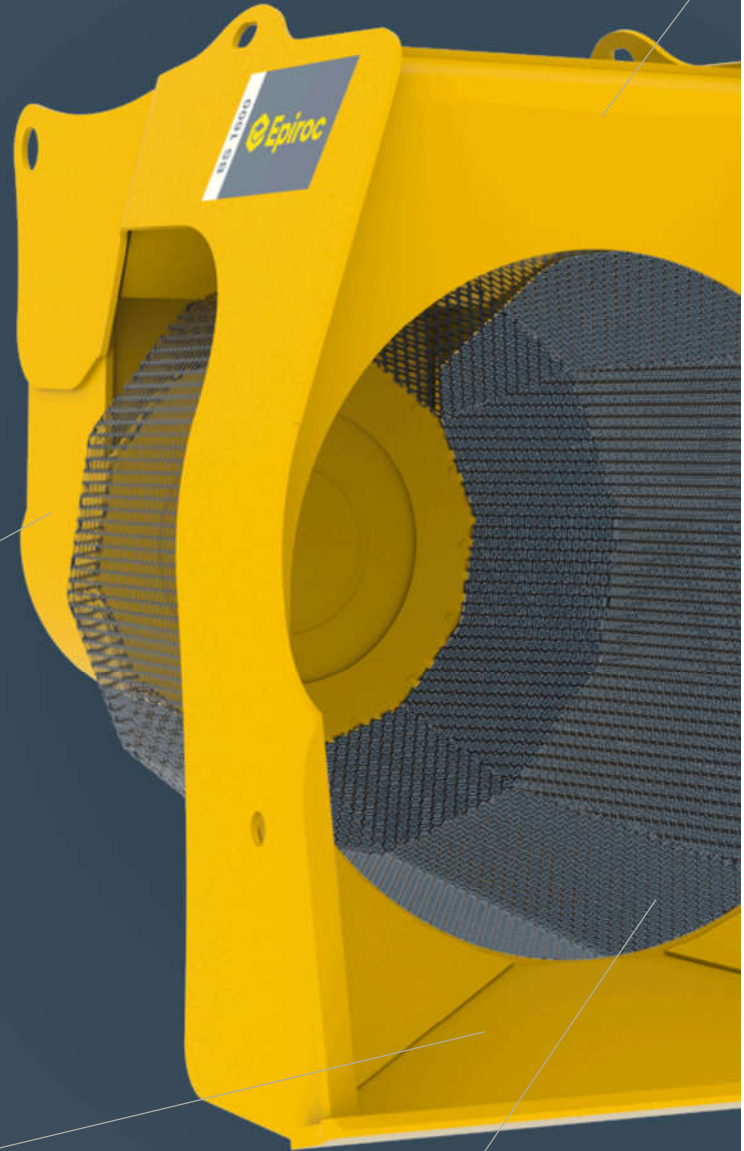


The internal **timing belt transmission**, driven by a powerful hydraulic motor, allows the use of a **large main roller bearing** and optimizes productivity.

The **large hopper capacity** enables maximum intake and thus a constant feeding with material.

Extra large **dodecagonal baskets** and **hexagonal profile of the screening mesh** enables efficient material screening.

The use of special wear resistant steel guarantees highest durability even under the harshest conditions

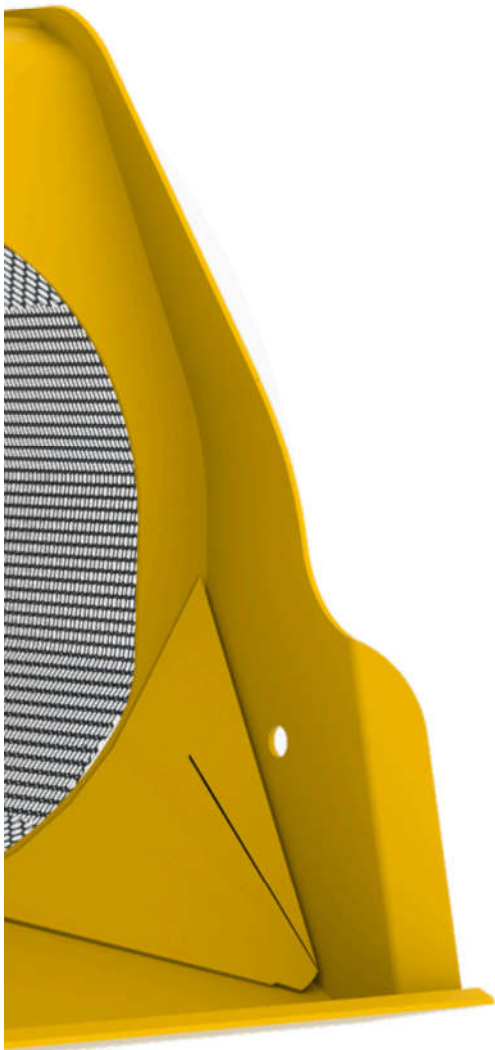

Stackable screening baskets with different mesh sizes: 20/30/40/50/60 and 80 mm



BS range		BS 1600	BS 2200
Carrier weight class ¹⁾	t	18-25	24-38
Service weight ²⁾	kg	1,710	2,450
Product weight	kg	1,550	2,200
A	mm	2,500	2,800
B	mm	1,700	2,000
C	mm	1,610	1,890
D	mm	1,300	1,600
E	mm	1,230	1,425
Loading volume	m ³	1.5	3
Oil flow rate	l/min	160-180	180-200
Max. operating pressure	bar	200	250

¹⁾ Weights apply to standard carriers only. Any variances must be agreed with Epiroc and/or the carrier manufacturer prior to attachment.

²⁾ Attachment with average-sized adapter plate.